



### Specification of installation


In order to ensure safety use, please notice the following items:

- .Read and understand the whole Specification
- .Suitable for the use of 110~130V and 60HZ
- .Please wear gloves as installment and avoid rot on the surface of plating
- .Must be installed on the fixed places and be checked annually
- .Please turn off the lighting source by soft cloth as cleaning prohibited to use of rotted detergent
- .Please connect with the local sales service center when there are any abnormality


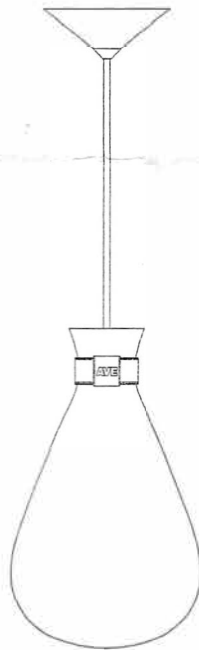


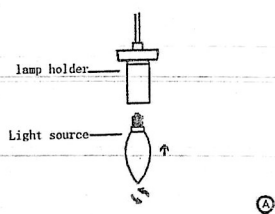


A. Put the light source to the lamp holder.




B. Remove the screws.

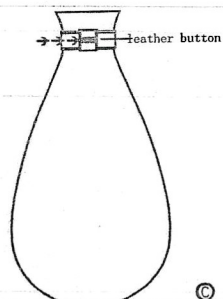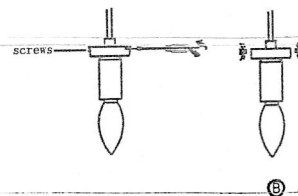


C. Push to open the leather button.




D. Undo the leather belt.

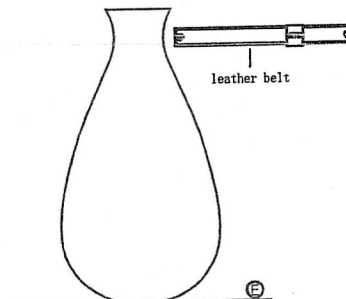


E. Take out the leather belt.

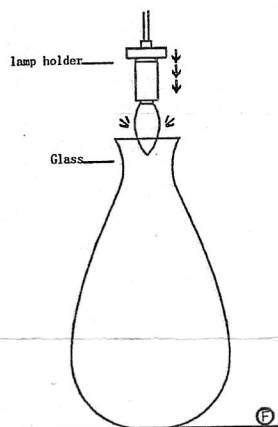



F. Put the lamp holder into the glass.

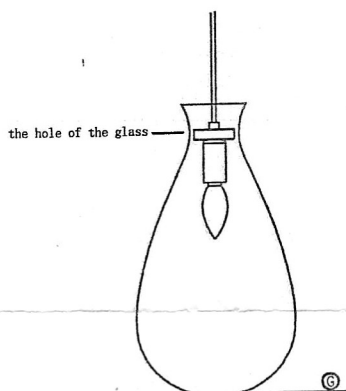


G. Check the hole of the glass.

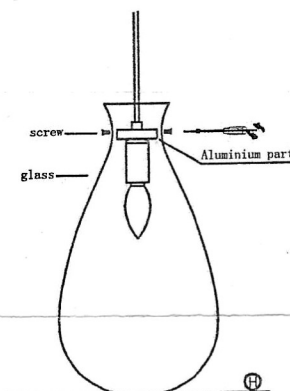


H. Fasten the glass and the aluminium part by screw.  
(Do not fasten the screw too tight, otherwise the glass will break.)

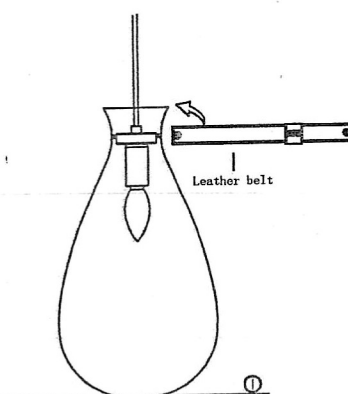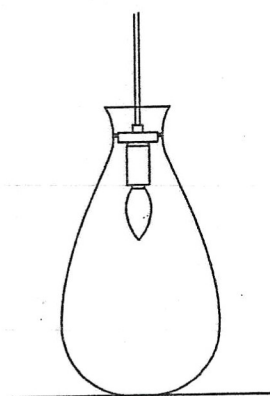


I. Put on the leather belt.

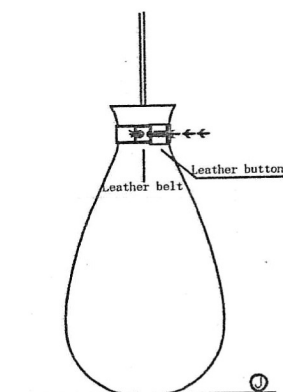


J. Buttoned up the leather belt ,  
and push the leather button to cover the button.



K. Install the swell plastic buttons into the ceiling.  
Use the tapping screws to fix the bracket into the ceiling.



L. Connect the power wire to the terminal block.



N. Fix the canopy to the bracket by screws.